



# LTP50

Pin clamp with vanishing hook

L	T	P	5	0	T	U	2	0	0	0	0	0
1	2	3	4	5	6	7	8	9				

<b>1 Series</b>	<b>2 Version</b>	<b>3 Size</b>
-----------------	------------------	---------------

LT = Pin clamp with vanishing hook

P = Pneumatic

50 =  $\varnothing$  50 mm

<b>4 Model</b>	<b>5 Sensing style</b>	<b>6 Pin diameter</b>
----------------	------------------------	-----------------------

T = With vanishing hook

N = No sensor  
(with protection plate)

U = Electronic 24 Vdc sensor with M12  
swivel connector

2 =  $\varnothing$  20 mm

3 =  $\varnothing$  25 mm

4 =  $\varnothing$  30 mm

5 =  $\varnothing$  35 mm

6 =  $\varnothing$  40 mm

<b>7 Locating pin</b>	<b>7 Working height</b>	<b>8 Progressive numbering</b>
-----------------------	-------------------------	--------------------------------

0 = Locating pin non included


1 = Locating pin included

0 = Standard

Progressive numbers for special products are assigned by the Sales Dept.



## Pneumatic pin clamp with vanishing hook

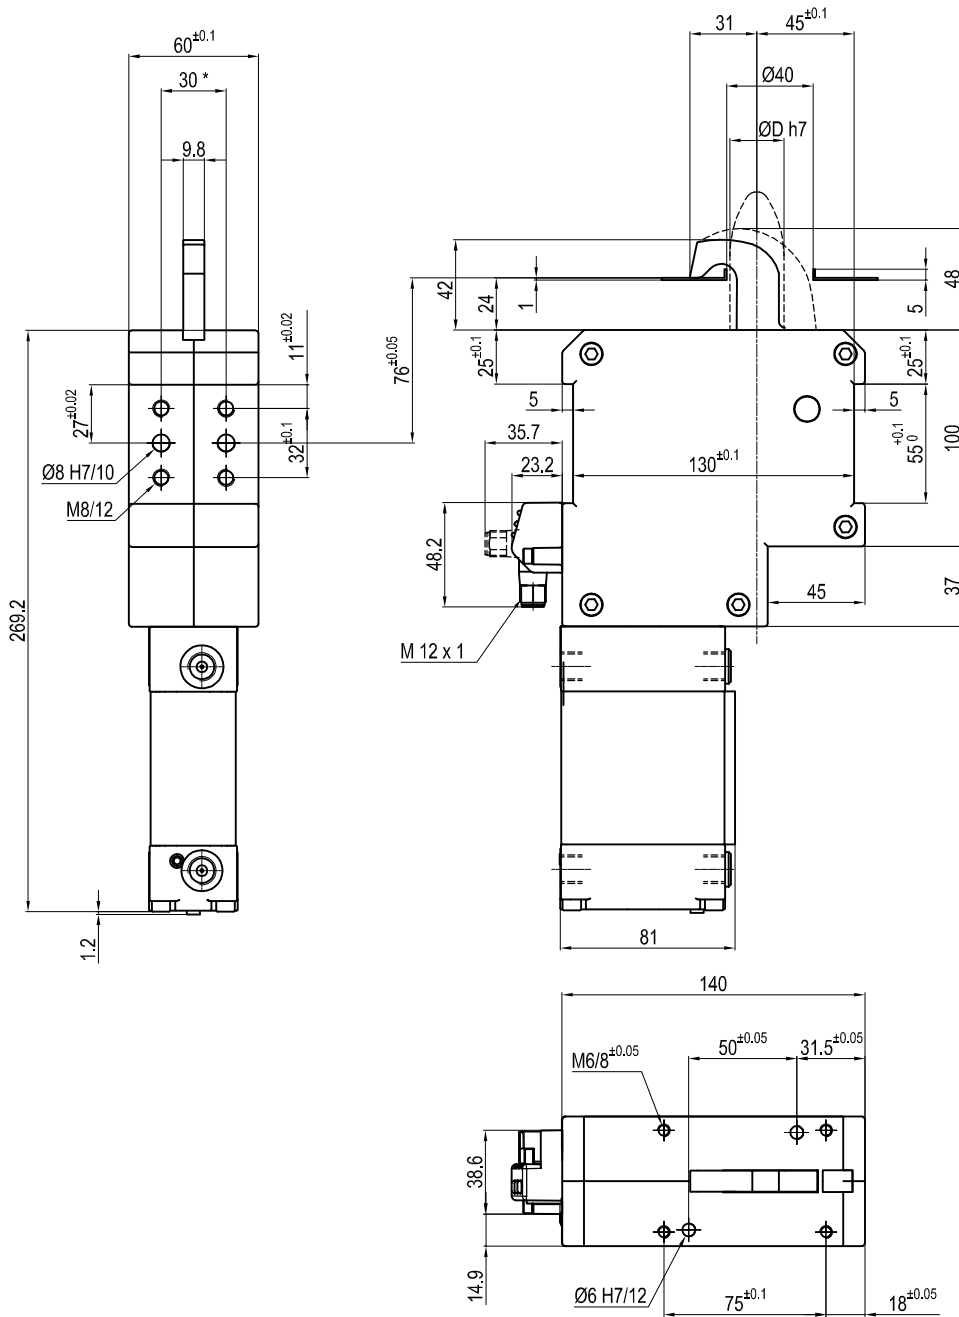

ØD
20
25
30
35
40


Bore Ø	Clamping force	Weight
50 mm	350 Kg	2.8 Kg

Min./Max. operating pressure: **0,4 / 0,8 MPa**  
 Operating temperature: **5° + 45° C**  
 Electronic 24 Vdc sensor with M12 swivel connector that can be orientated at 0° or 90°  
 Protection class: **IP 54**  
 Pneumatic ports on both sides

\* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.

## Pneumatic pin clamp with vanishing hook

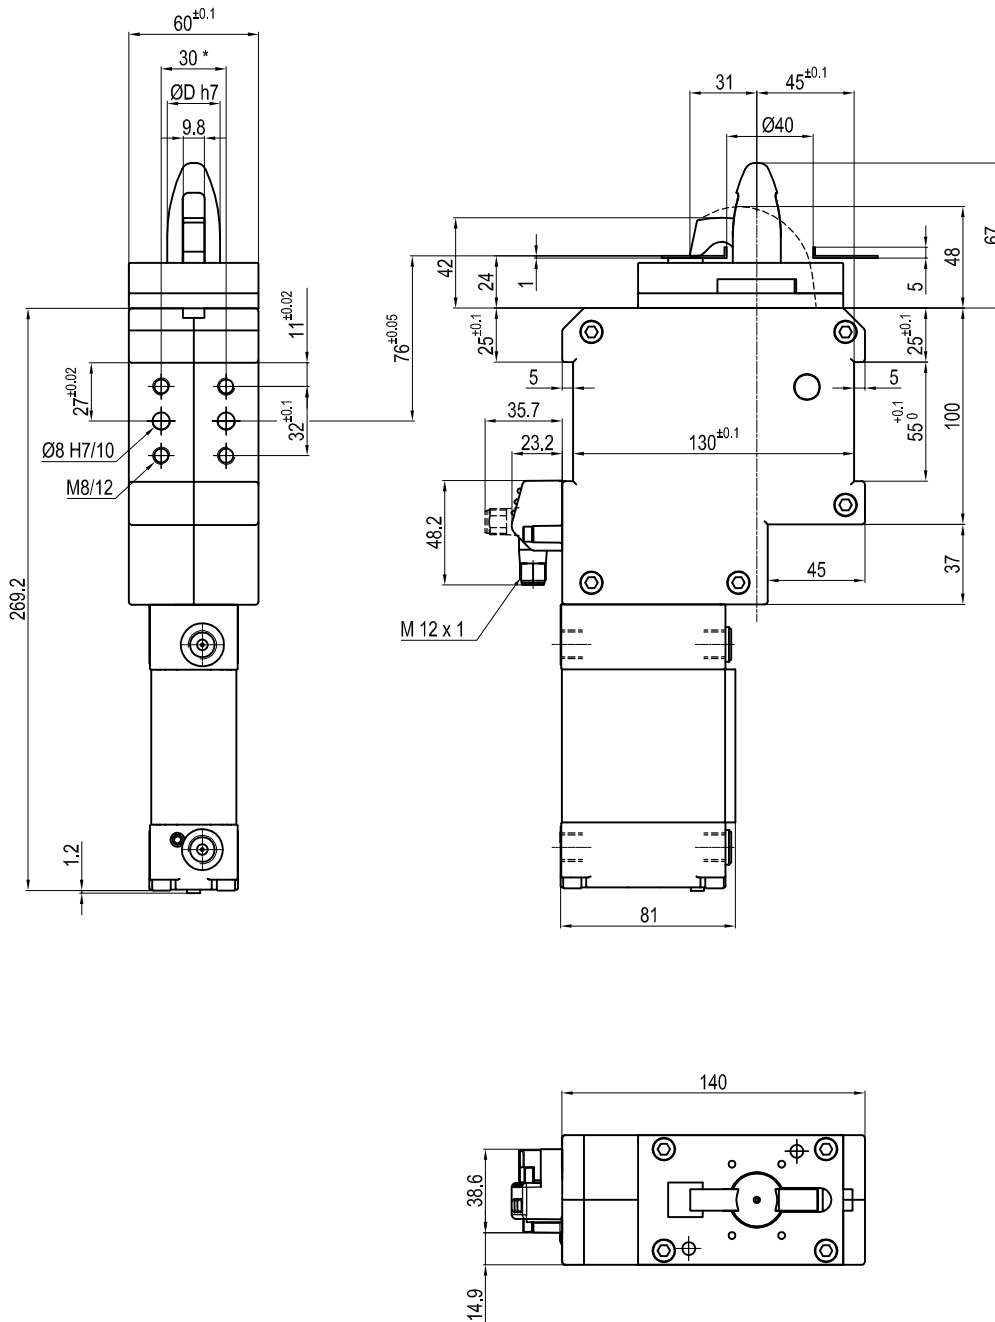

ØD
20
25
30
35
40

Bore Ø	Clamping force	Weight
50 mm	350 Kg	3.2 Kg

Min./Max. operating pressure: **0,4 / 0,8 MPa**  
 Operating temperature: **5° ± 45° C**  
 Electronic 24 Vdc sensor with M12 swivel connector that can be orientated at 0° or 90°  
 Protection class: **IP 54**  
 Pneumatic ports on both sides

\* : TOLERANCE BETWEEN DOWEL HOLES ± 0.02, TO SCREW HOLES ± 0.1

Subject to technical modification without notice.